



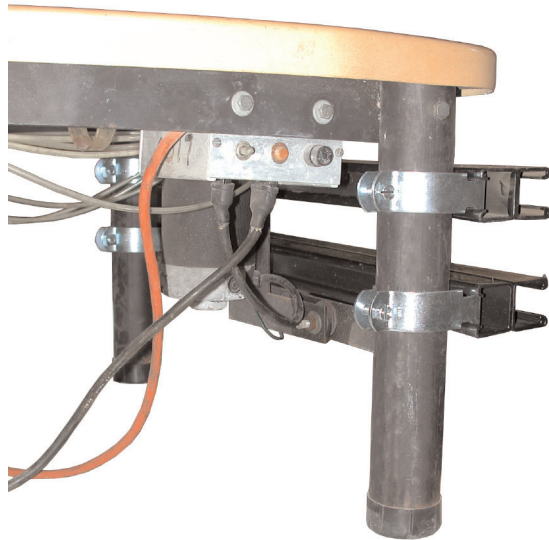

# Axner Wheel Bracket: For Non-Axner Wheels

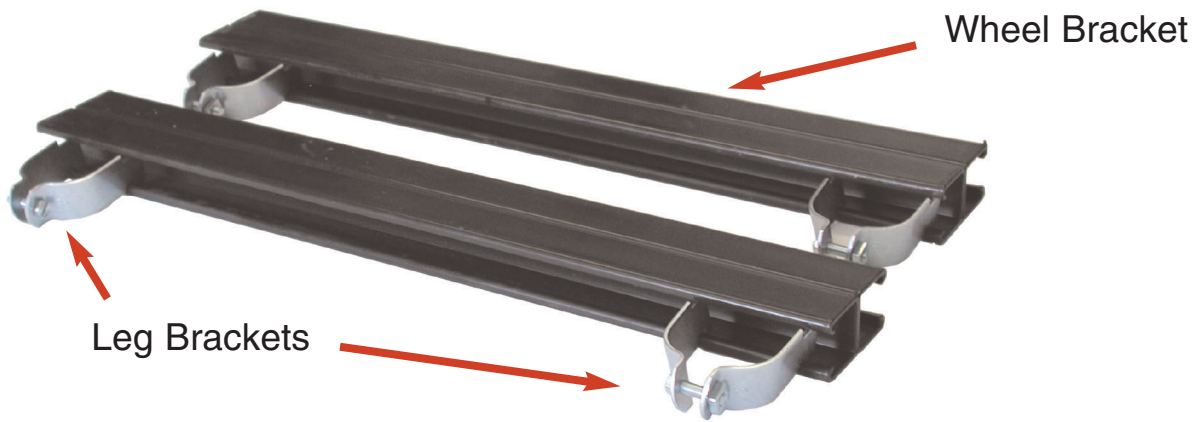

Place the leg brackets around your wheel's legs. Ensure that the Wheel Bracket is level and tighten its bolts.

Place the second Wheel Bracket approximately 1.5" below the top bracket. Ensure that the second Wheel Bracket is level and tighten its bolts.



Space between Wheel Brackets should be approximately 1.5"